


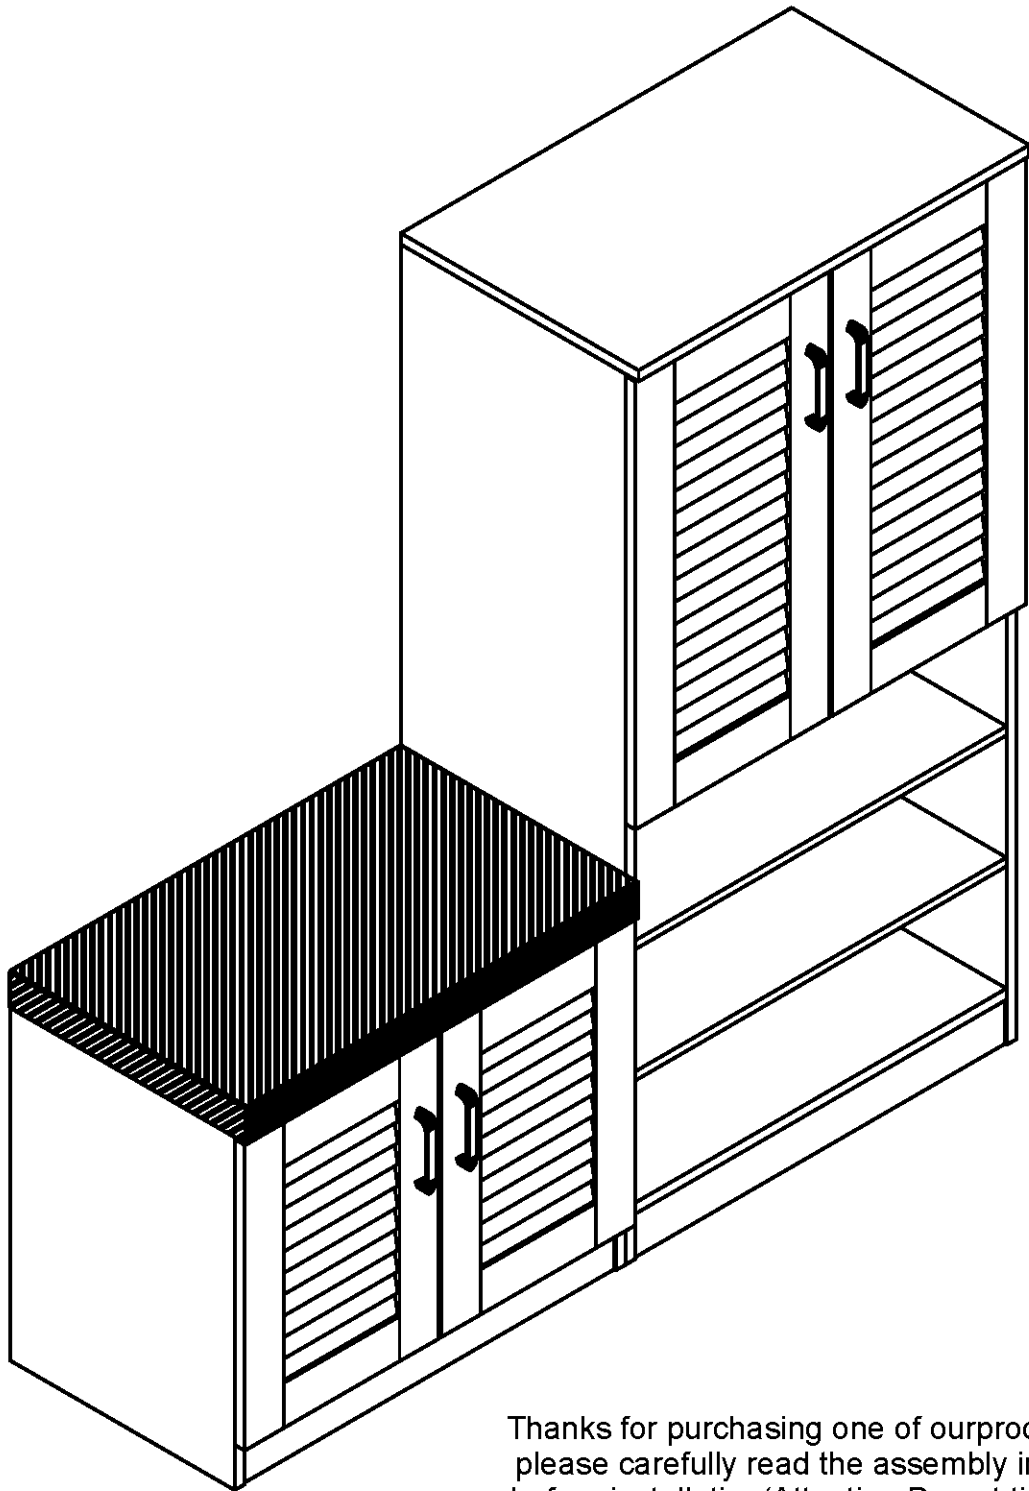


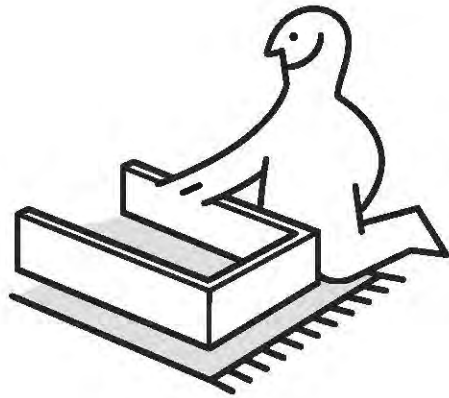

Thanks for purchasing one of our products,
please carefully read the assembly instructions
before installation(Attention:Do not tighten
the screws before all screws are in place).

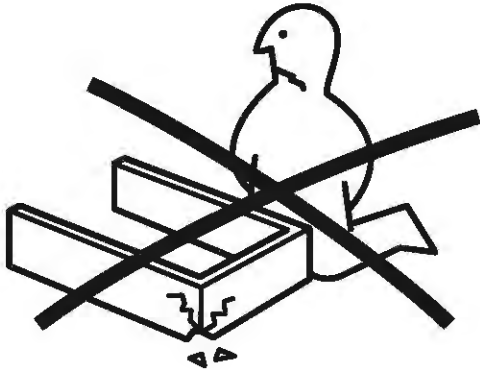


(Tools not provided)
Flat Blade Screwdriver
Phillips Head Screwdriver
Wooden Hammer




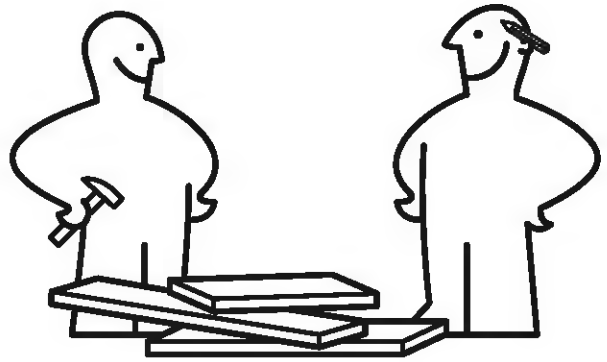


To Assemble the Unit
Wooden Hammer

PAGE1
Exploded View

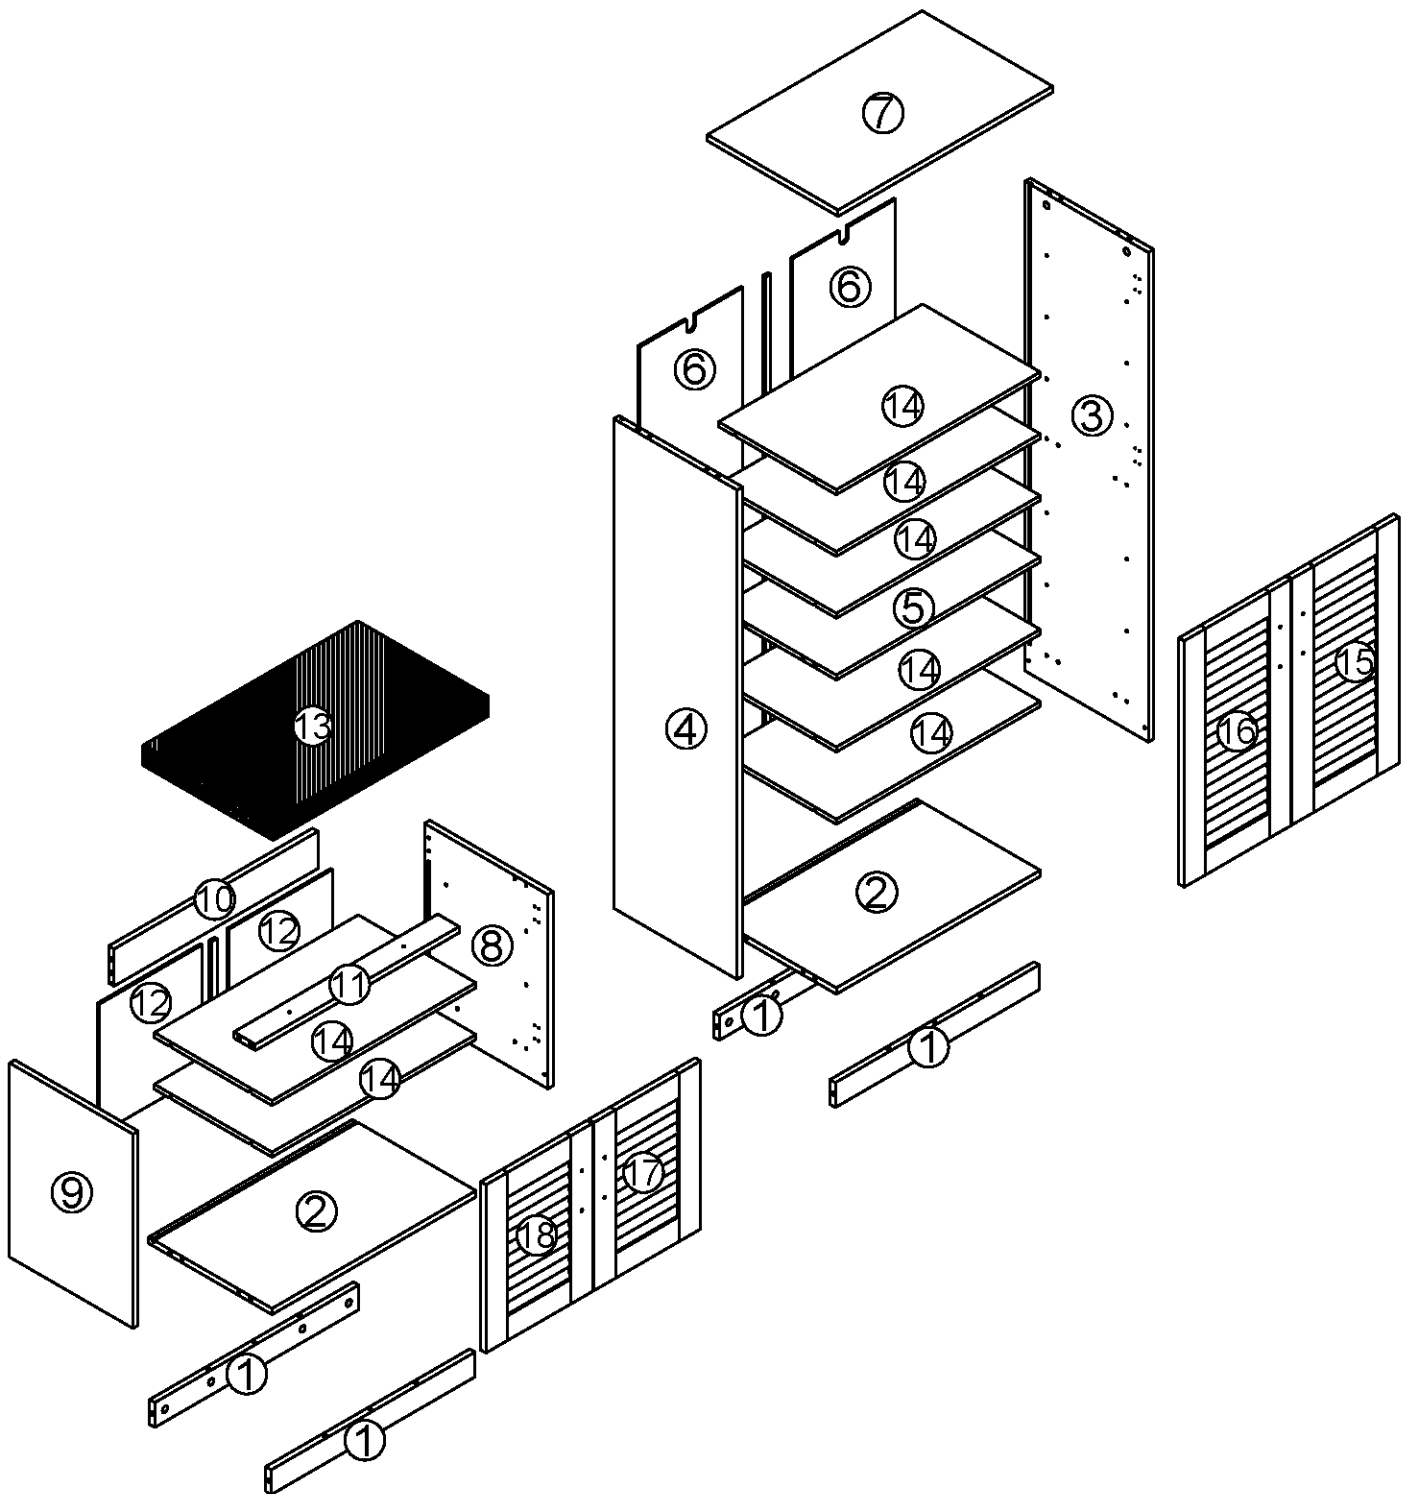


PAGE2
will require these parts

A  40+2PCS	B  40+2PCS	C  M6X30MM 12+2PCS	D  M3.5X14M 66+2PCS
E  4PCS	F  8+1PCS	G  8PCS	H  28PCS
I  2PCS	J  2PCS	K  1PC	L  1PC
M  M3.5X30M 2PCS	N  4+1PCS	O  2PCS	P  2PCS
Q  M3.5X25M 2PCS			



PAEG3

will require these parts

STEP1

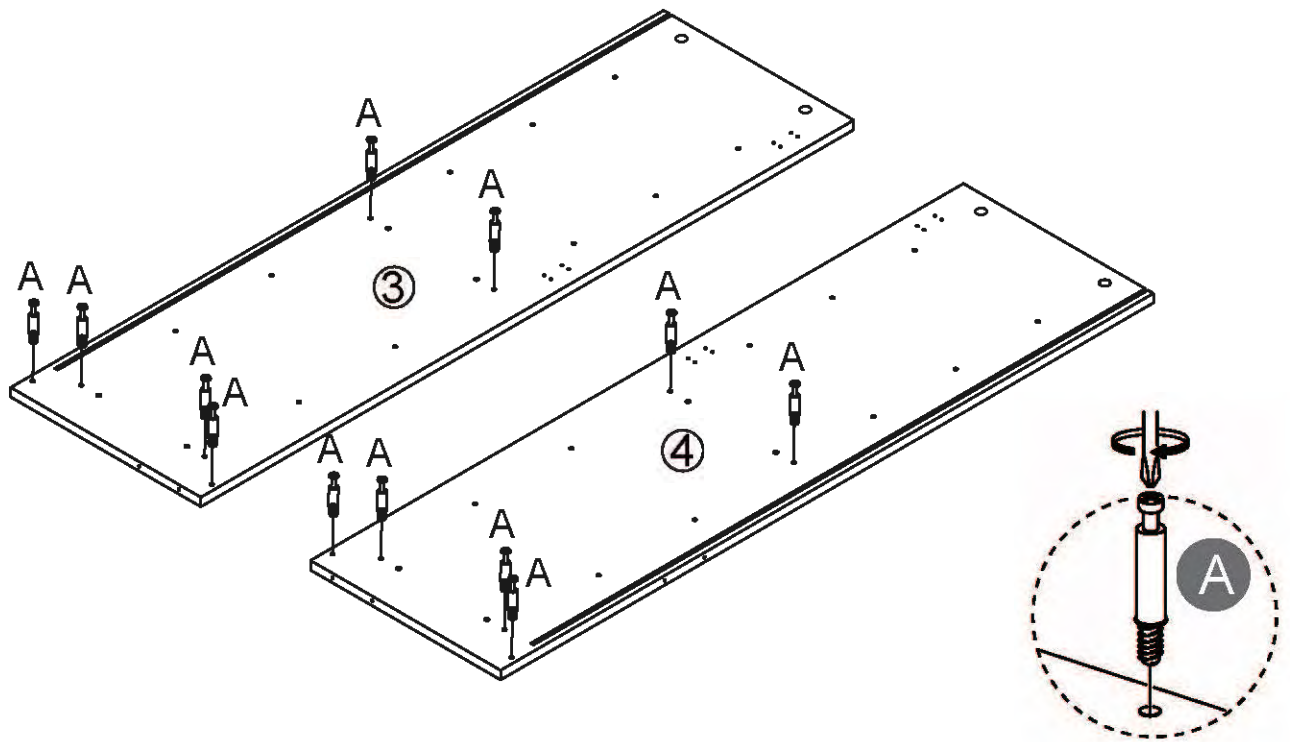

AX12

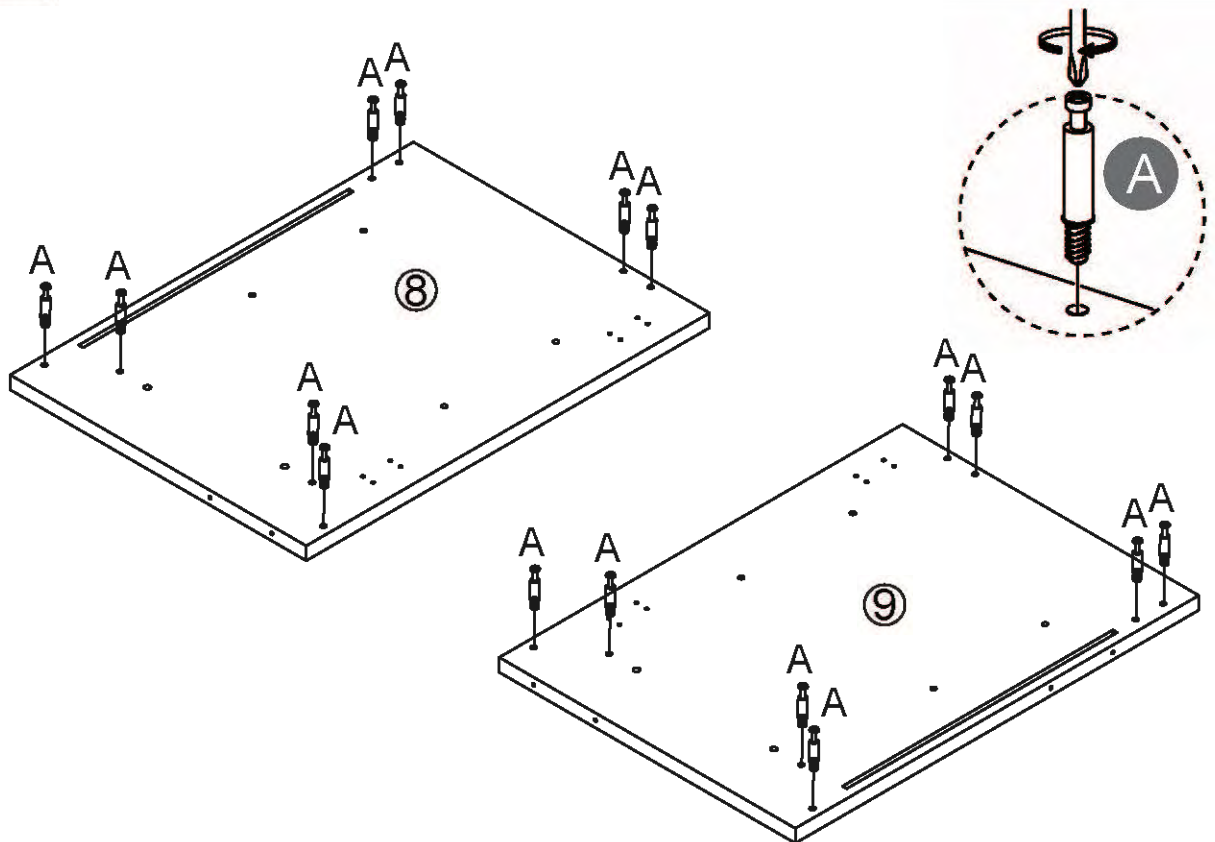


AX16


PAEG4

will require these parts


STEP2

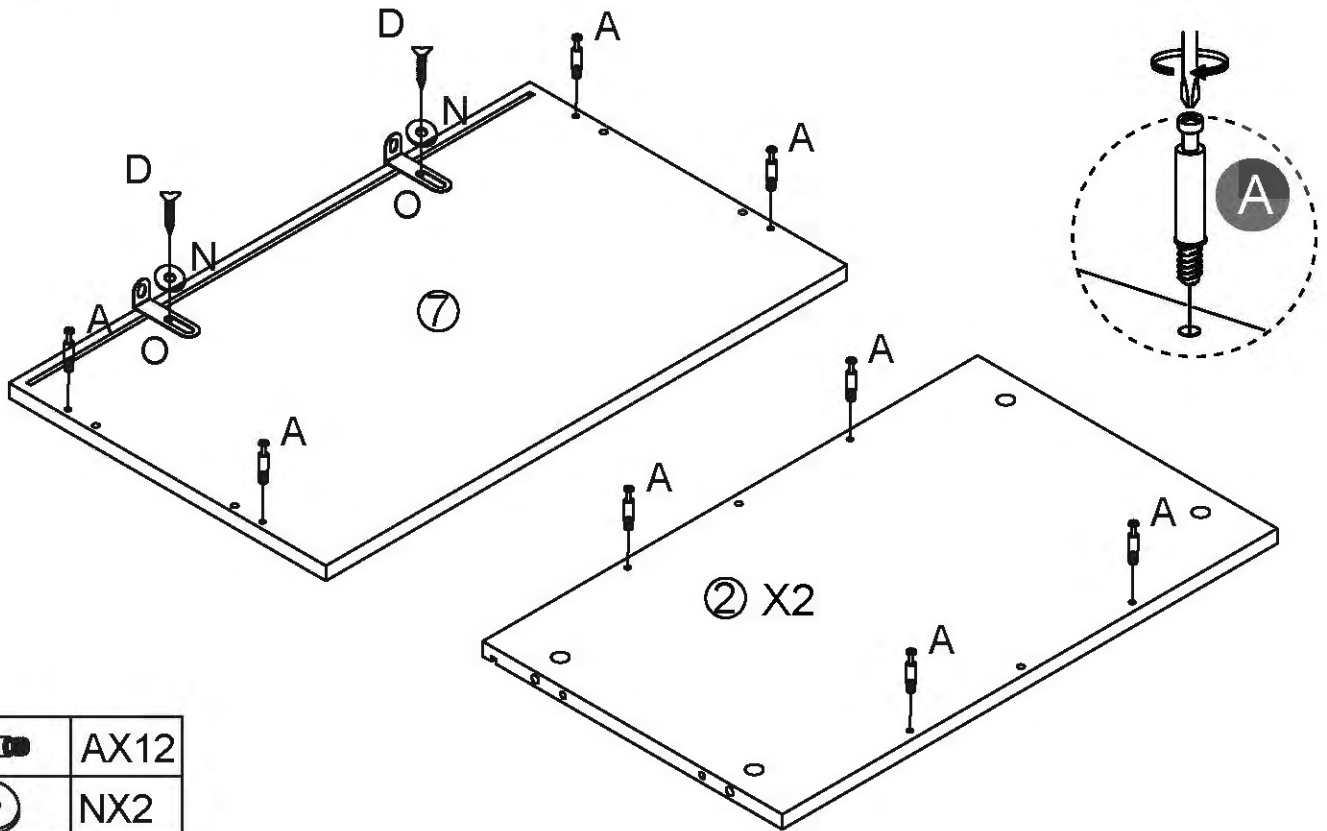

	AX12
	NX2
	OX2
	DX2

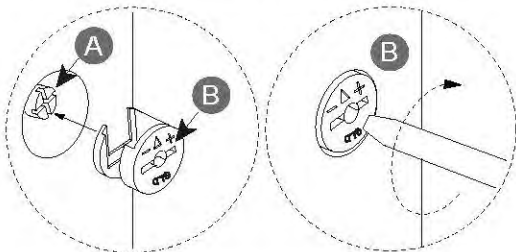

Attention:
Put (B) into the hole and turn (B) clockwise to lock (A) tightly.

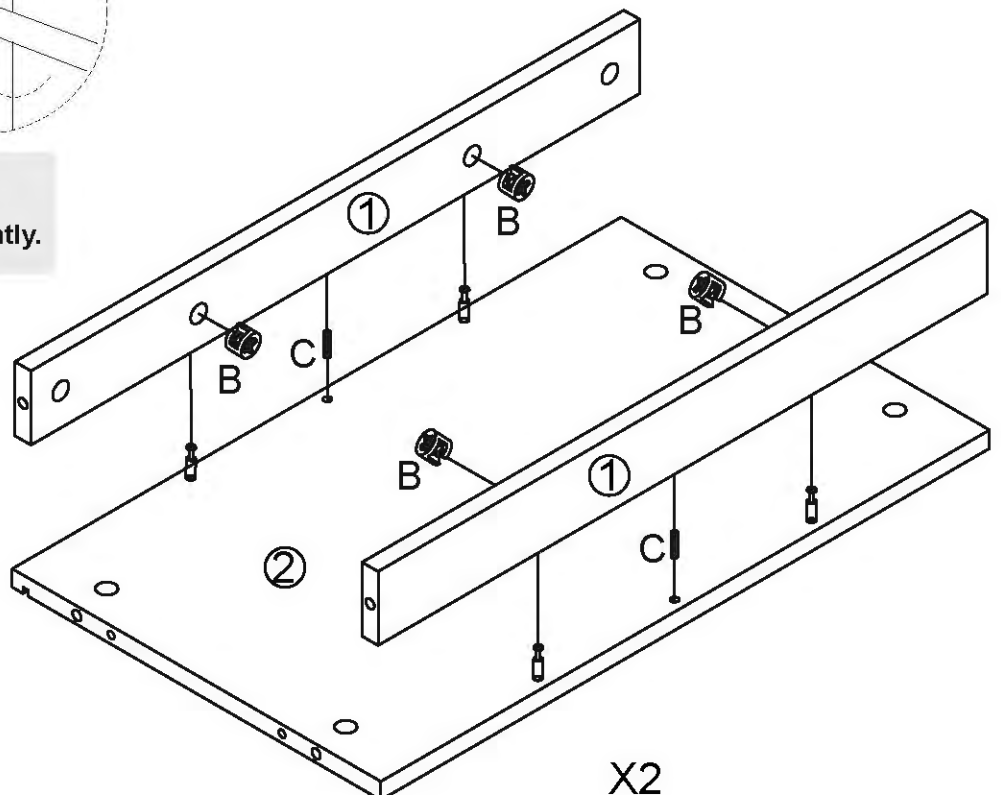


	BX8
	CX4

PAEG5


will require these parts

STEP3

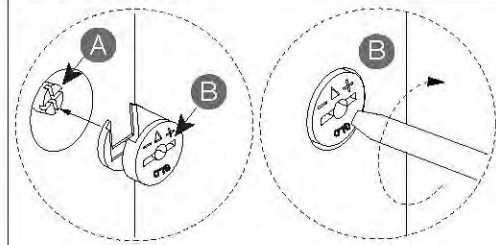


Attention:

Put (B) into the hole and turn (B) clockwise to lock (A) tightly.

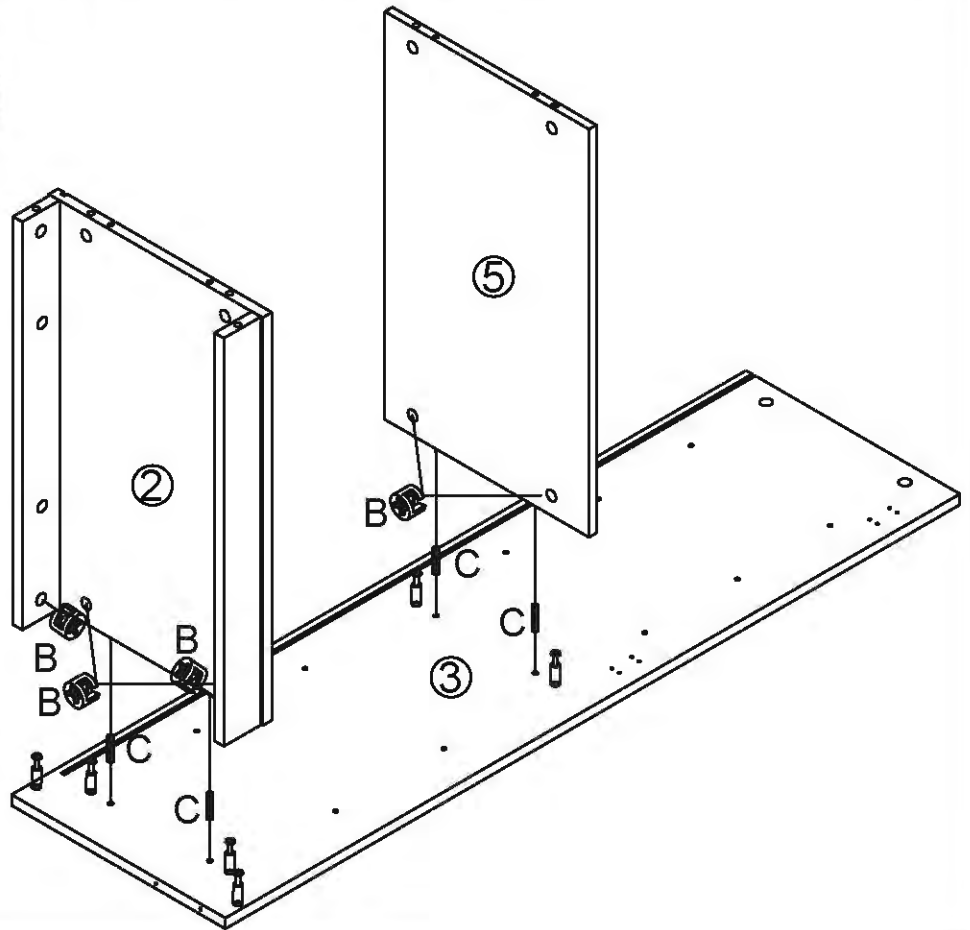


	BX6
	CX4

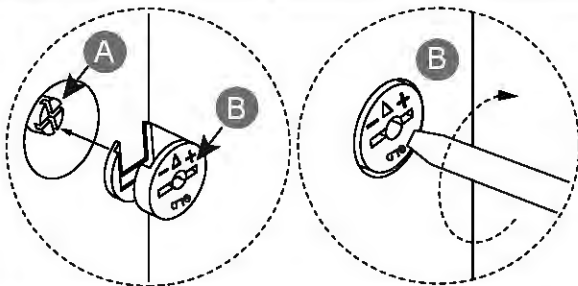

Attention:

Put (B) into the hole and turn (B) clockwise to lock (A) tightly.

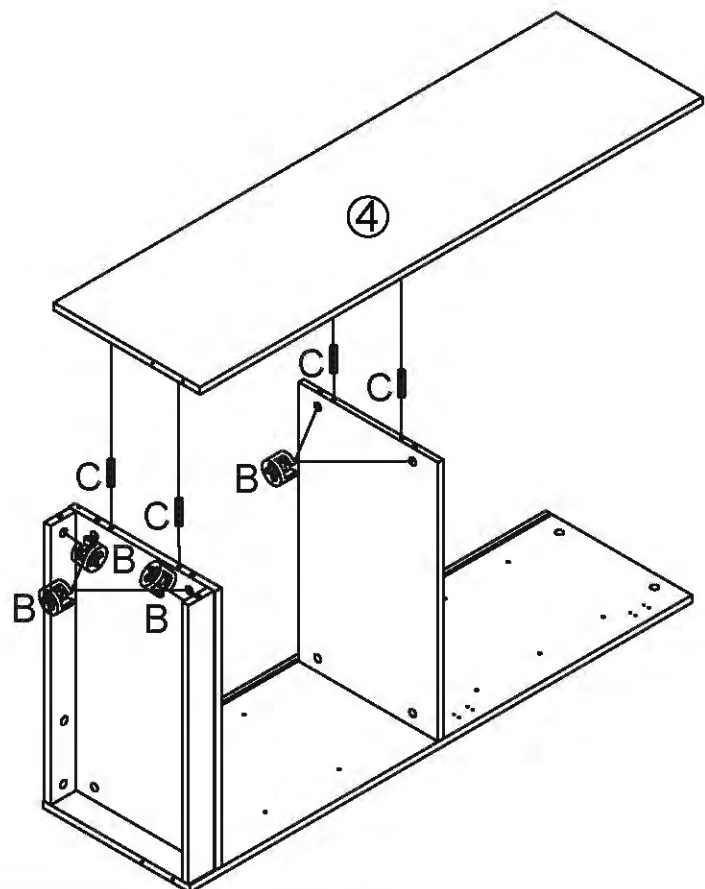


	BX6
	CX4


PAEG6

will require these parts

STEP4

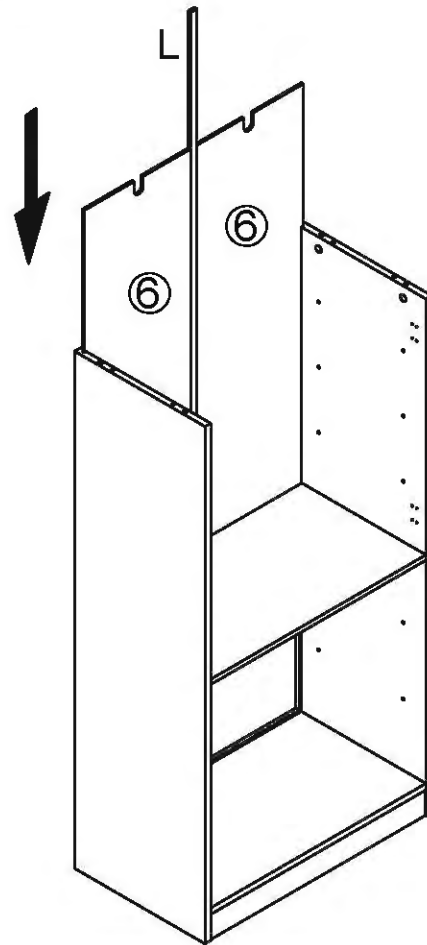


— LX1

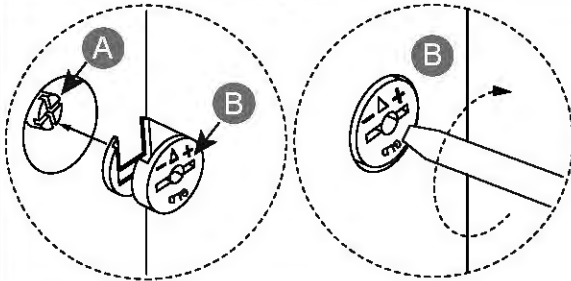

Attention:

Put (B) into the hole and turn (B) clockwise to lock (A) tightly.

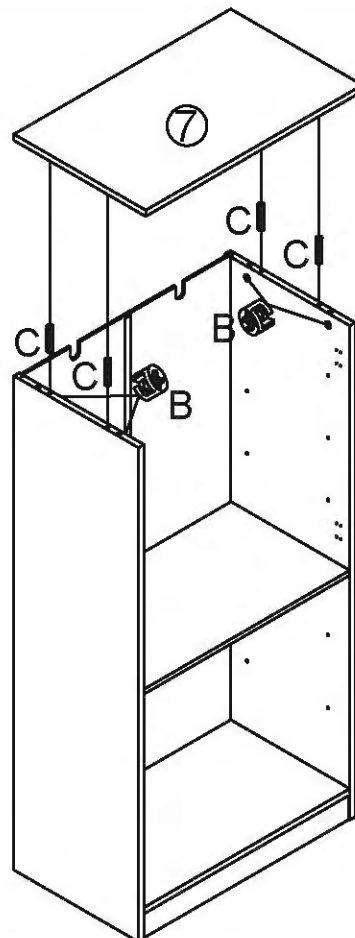

BX6




CX4

PAEG7


will require these parts

STEP5

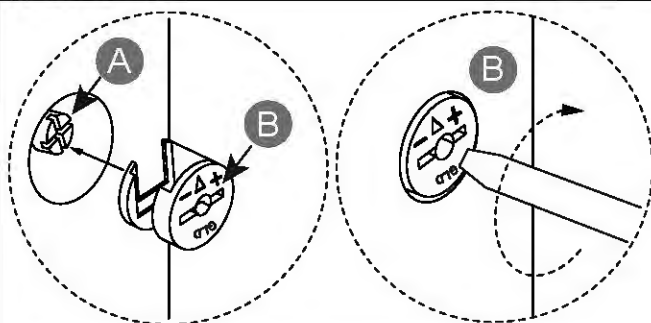


Attention:

Put **(B)** into the hole and turn **(B)** clockwise to lock **(A)** tightly.

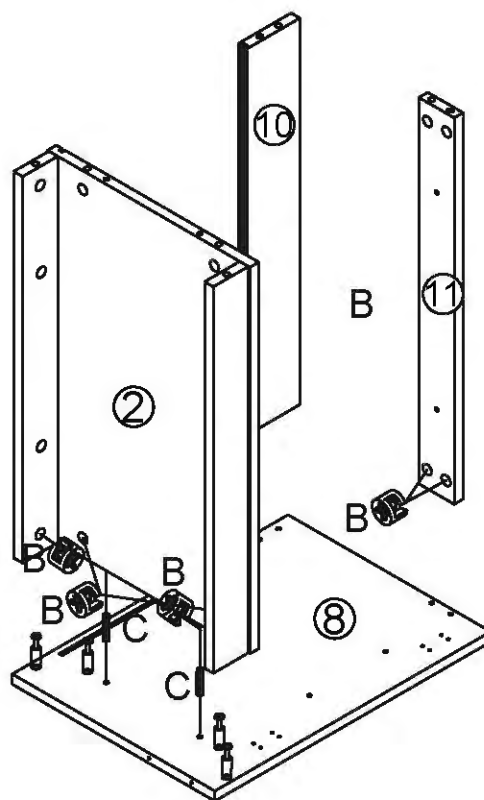

	BX8
	CX2

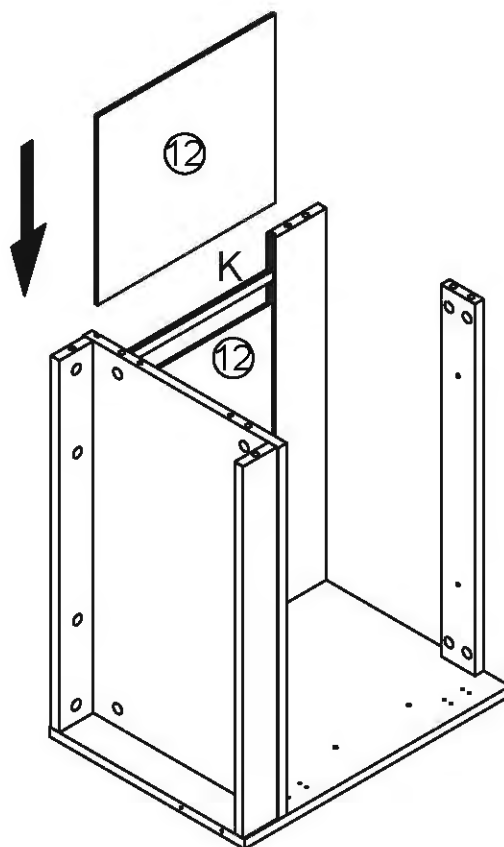


	KX1
--	-----

PAEG8


will require these parts

STEP6

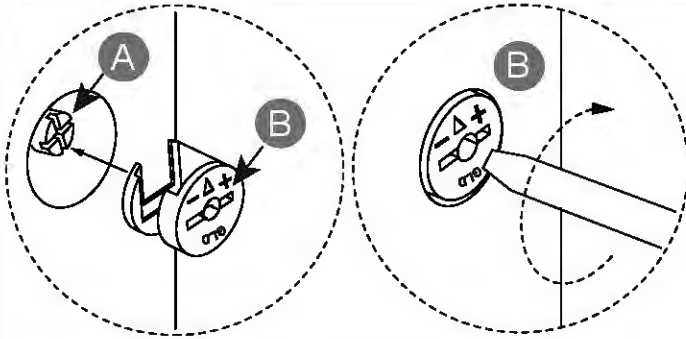



Attention:

Put (B) into the hole and turn (B) clockwise to lock (A) tightly.

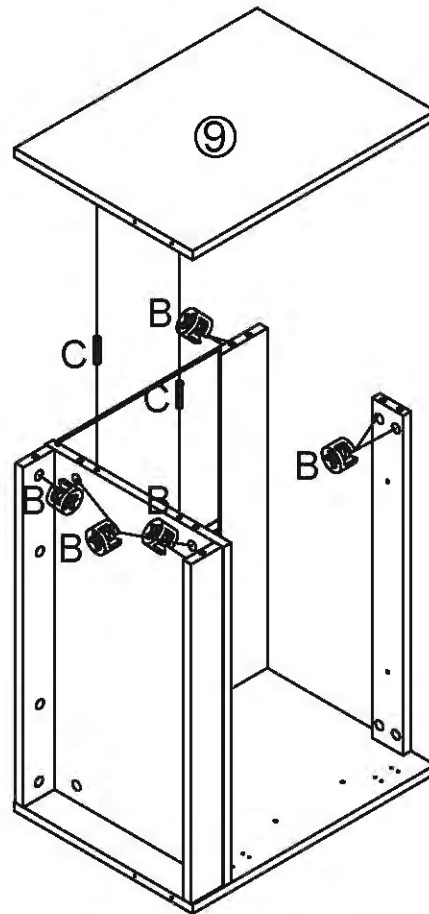

	BX8
	CX2

This step can be interchanged left and right as needed

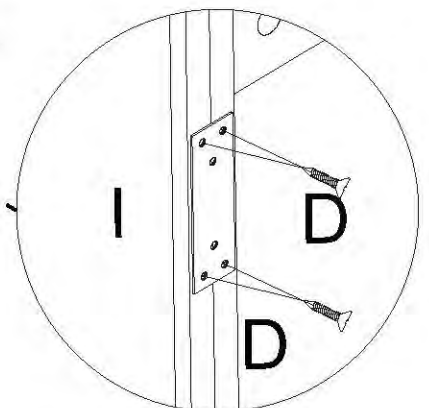
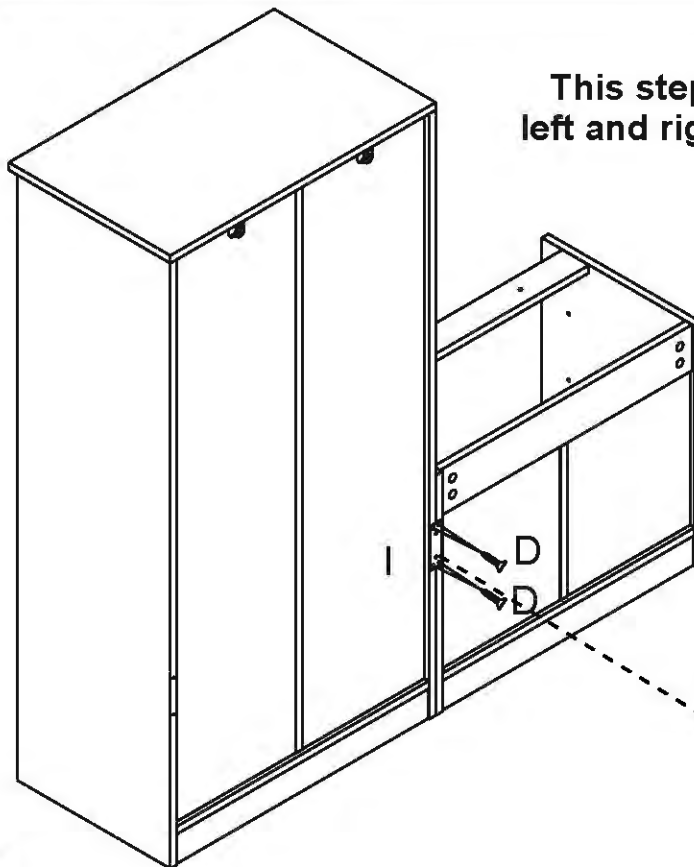


	DX4
	IX1



PAEG9

will require these parts

STEP7

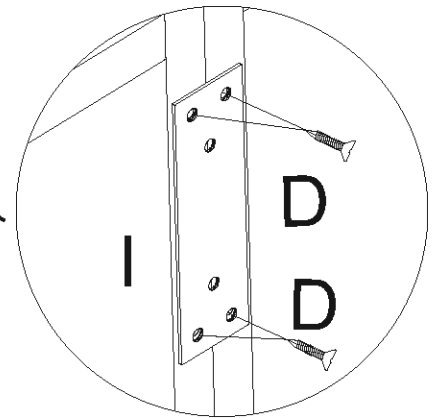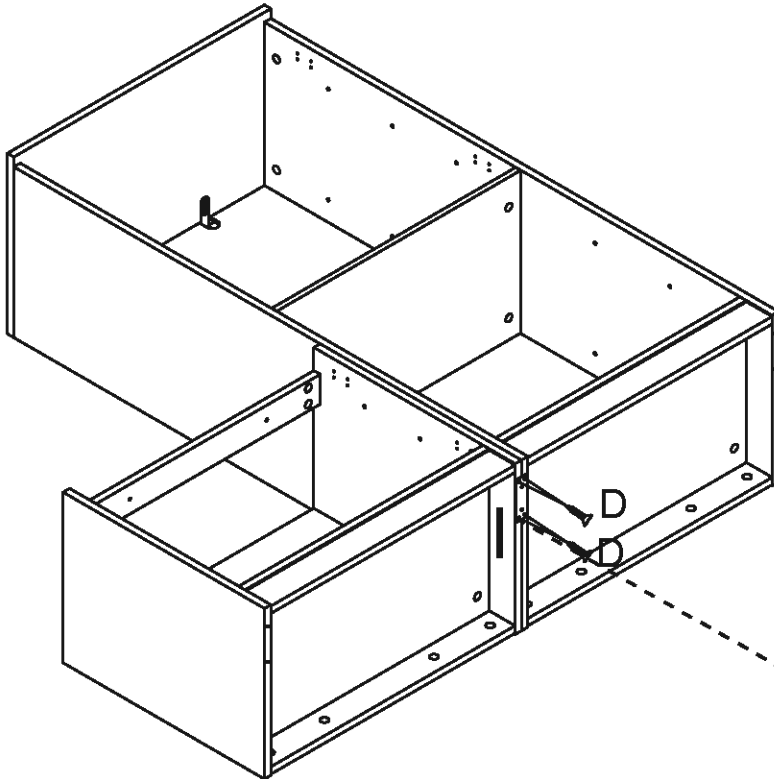

	DX4
	IX1

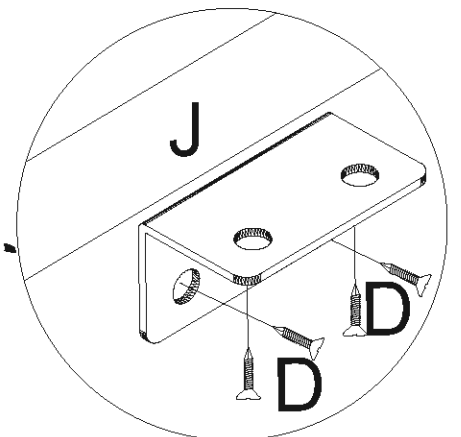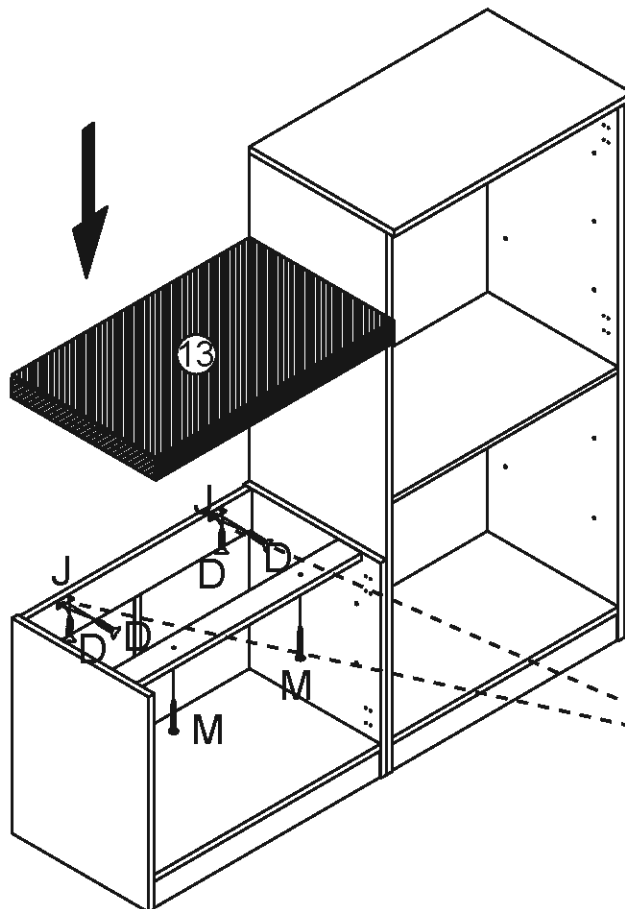


	DX4
	JX2
	MX2

STEP8

will require these parts


Drill 2 holes on the wall at the required position for anti-falling device installation.

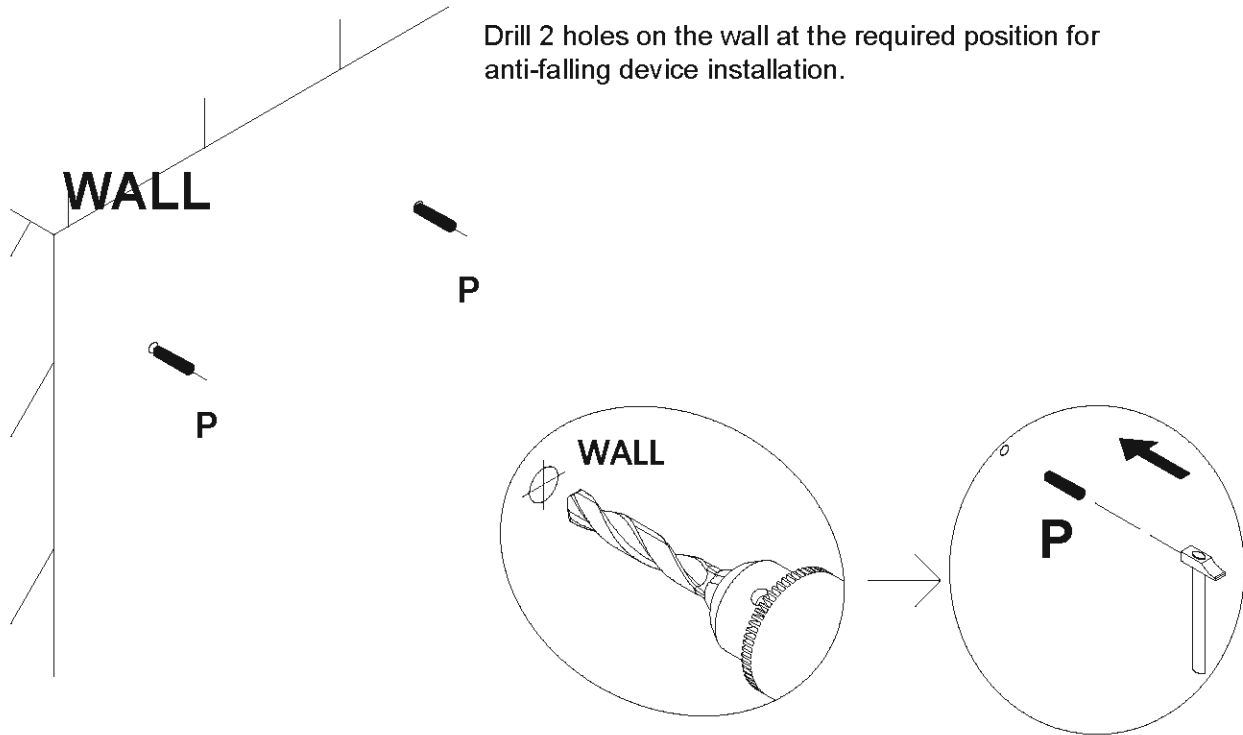

Ux 2

Move the cabinet to the required position, use the "Q" long screw to fix the cabinet to the wall.

WALL

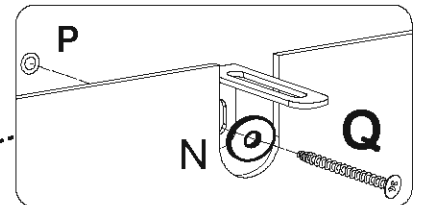


NX2



QX2

STEP9



PAEG11
will require these parts

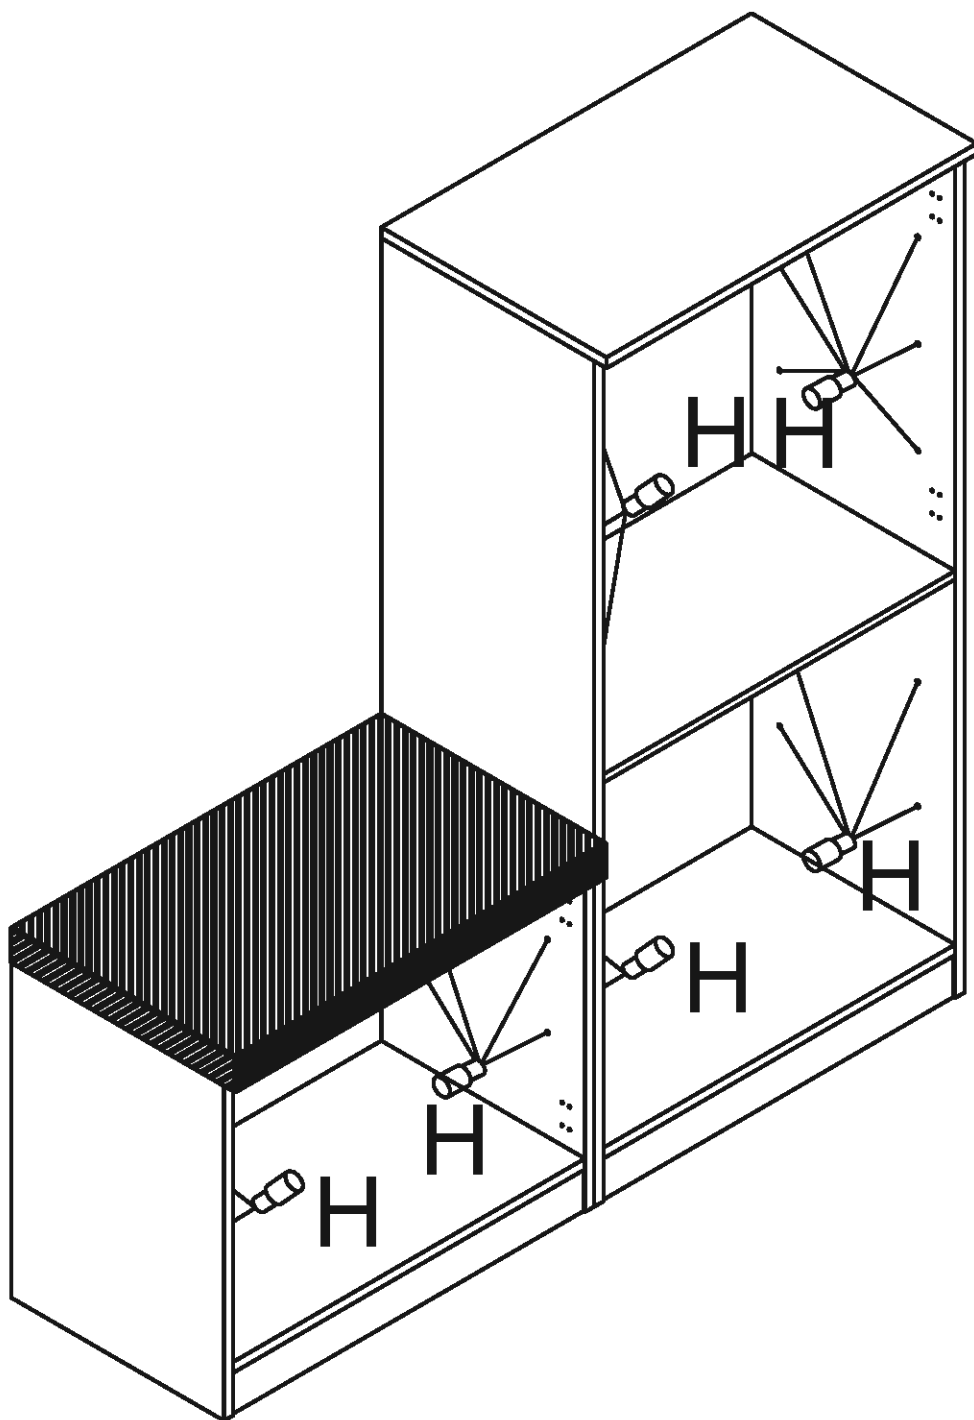

HX28

STEP10


PAEG12
will require these parts

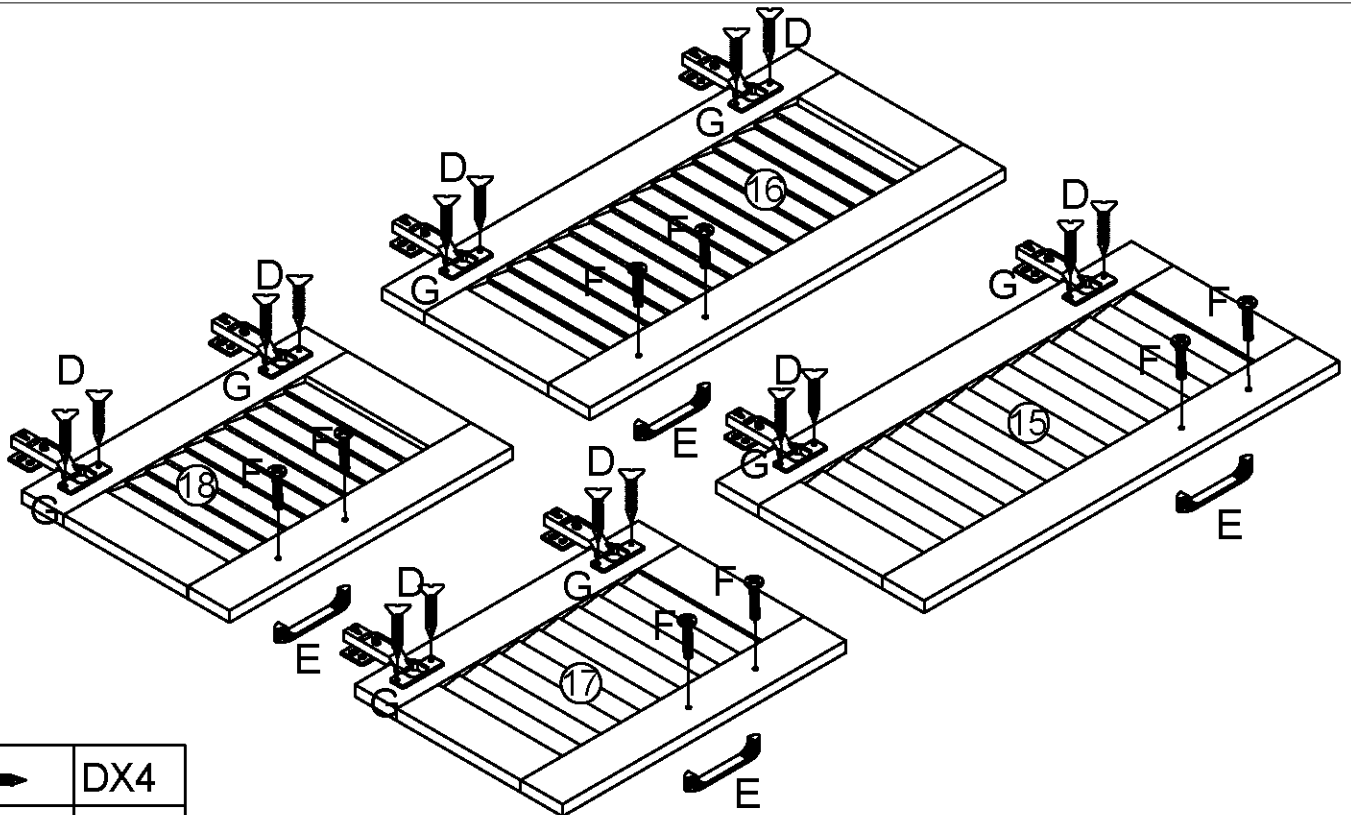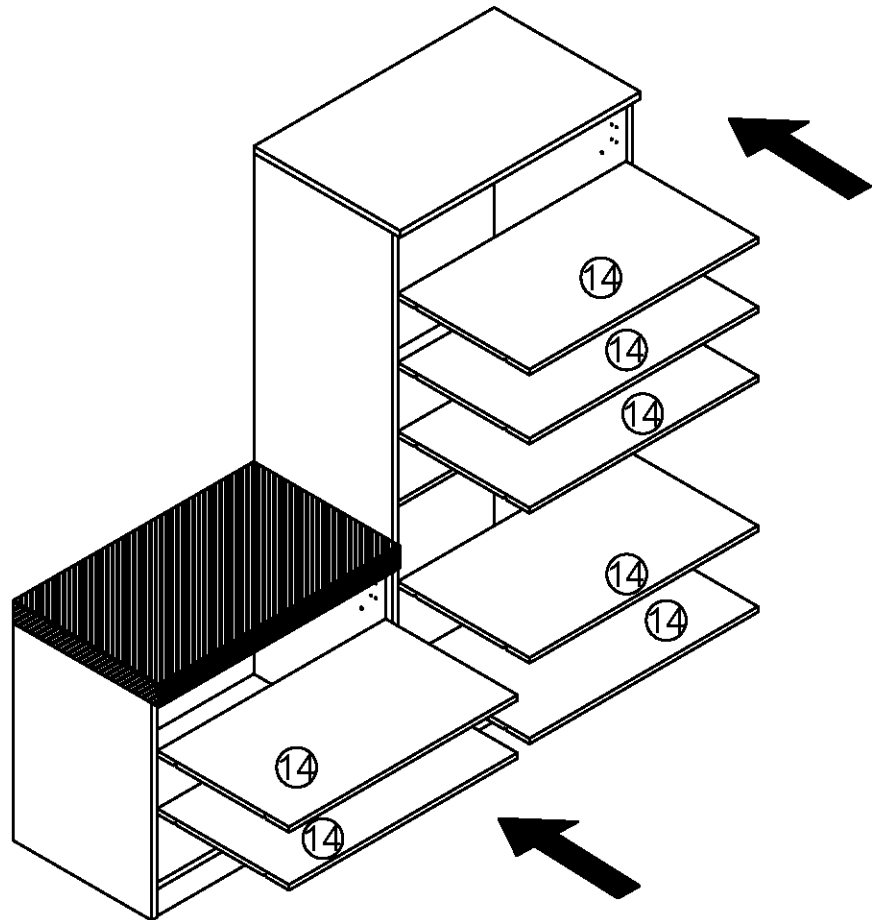


	DX4
	EX4
	FX8
	GX8

PAEG13
will require these parts

STEP11

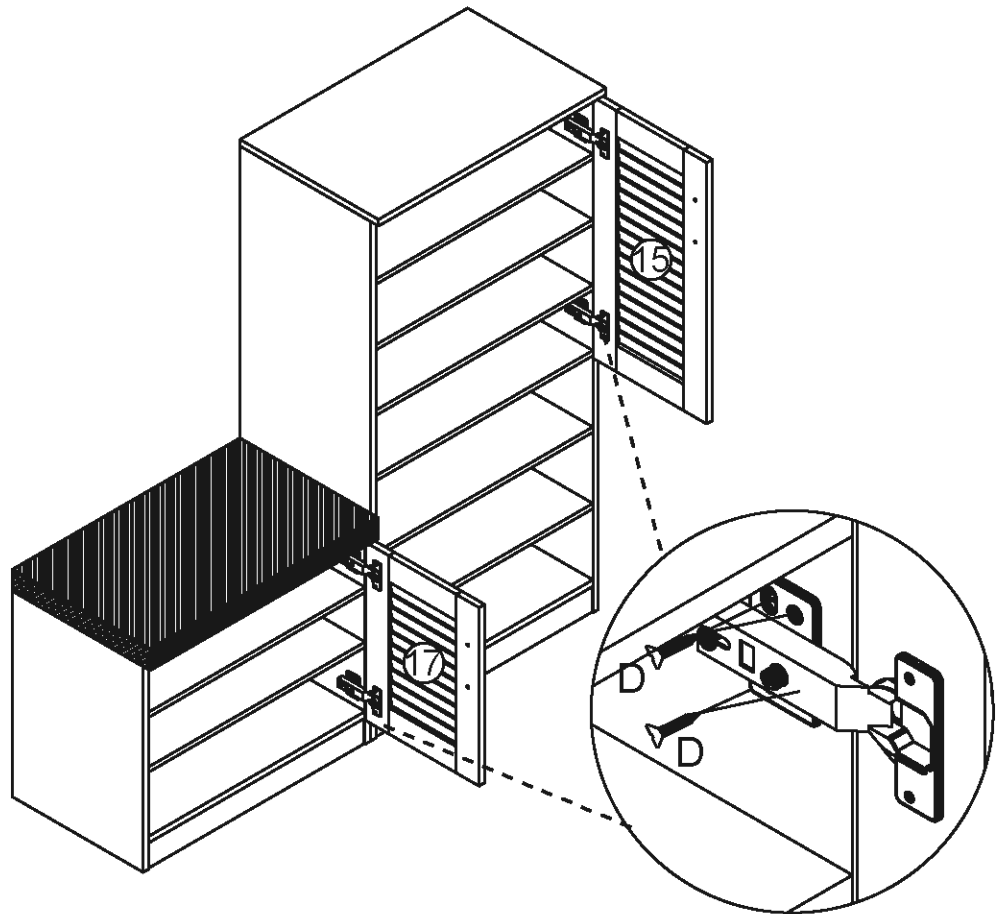

DX16

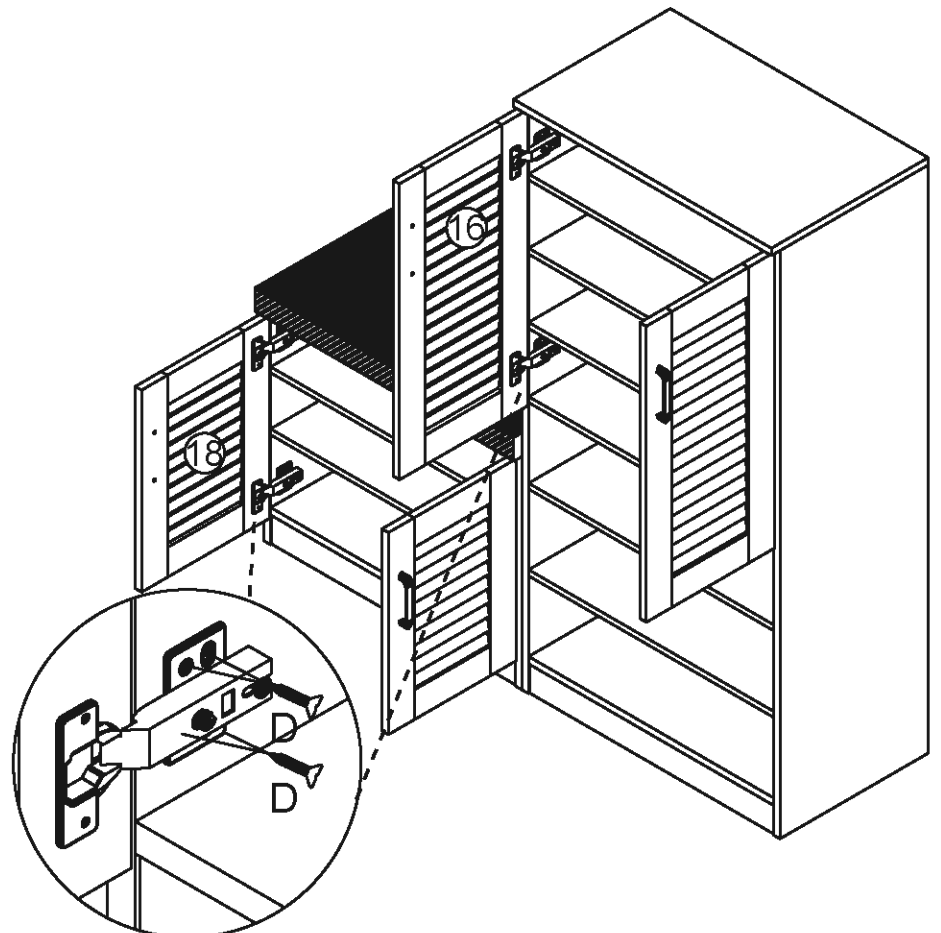


DX16


The ways to adjust the door

- Before adjusting the hinge, please check whether the cabinet is skewed.
- If the skew can not be repaired, please remove the anti-tipping device first, then adjust the cabinet to vertical position.
- Please adjust the hinge with the door open.
- Please operate it with more than 2 people, one person holds the door and the other one adjusts the screw.


Components Name

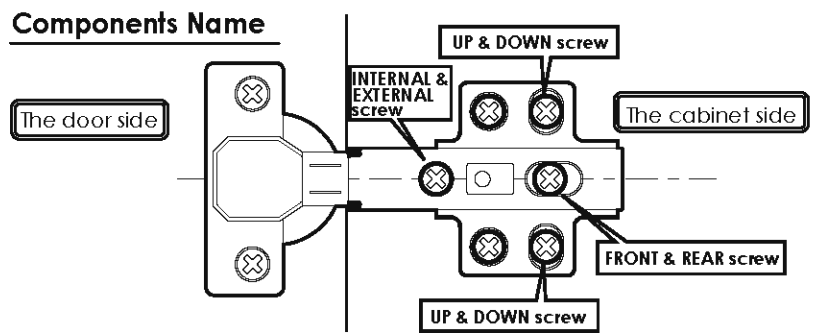

Obvious gaps between doors or Doors don't look closed




- 1 Turn "internal & external screw" to the right can make the door approach inside. Please adjust the doors little by little.

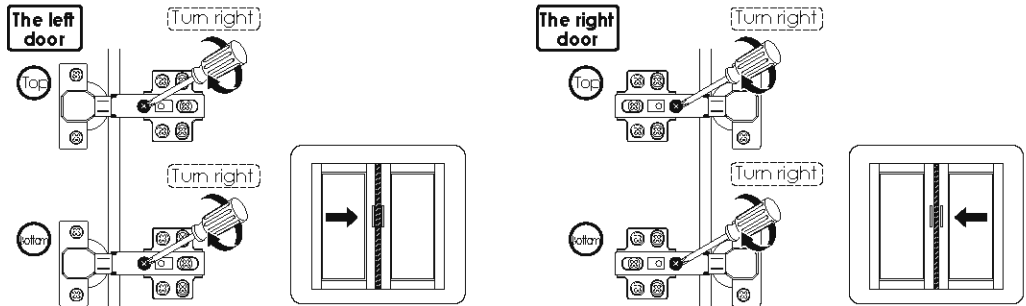


※ If the 2 doors are overlap, please turn the "internal & external screw" to the left.

When door is crooked




Please take the following steps to adjust first.

- 1 Rotate the "front and rear screws" to the left




※ After adjusting the "front and rear screw", the door still does not change, please turn the "internal & external screw" to the right slightly.


- 2 Push the door to the cabinet




- 3 Rotate the "front and rear screws" to the right




When door is leaning




- 1 Turn "internal & external screw" to the left can make the top of the door tilted outward.

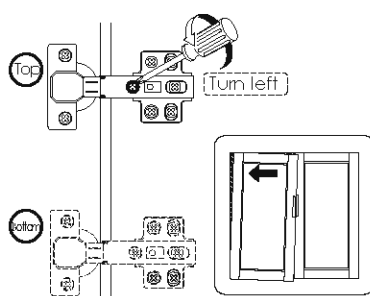


Protruding to the upside




- 1 Turn "internal & external screw" to the left can make the bottom of the door tilted outward.

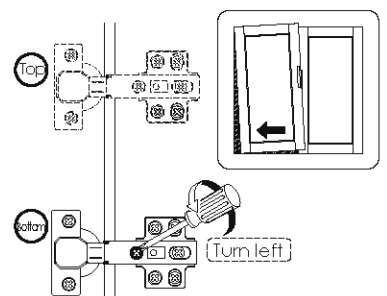


When the door is higher on top




- 1 Turn "up & down screw" to the left



- 2 Lower the door's height so that 2 doors are of the same height.



- 3 Turn "up & down screw" to the right



※ If the door is lower on bottom, please lift up the left door slightly on step 2